



LIGHTING SYSTEM CONTROLLER

This Heliport Lighting System Controller is suitable for use with all kind of heliport lights with “ON” and “OFF” Switch. It is suitable to use in both indoor and outdoor applications.


KEY FEATURES

1. The enclosure is made with stainless steel SUS304 material with high corrosion resistant feature.
2. The standard controller has 6 output circuits designated for specific lighting loads to independently control separate circuits as determined by the installer.
3. This controller is powerful, reliable, safe, easy to use and maintain.
4. This controller also has built in surge protection device for transient overvoltage protection.



DIMENSIONS

Overall dimension (mm)	600(L) x 550(W) x 170(H)
Installation dimension (mm)	576 x 518 x M8
Weight	17 kg

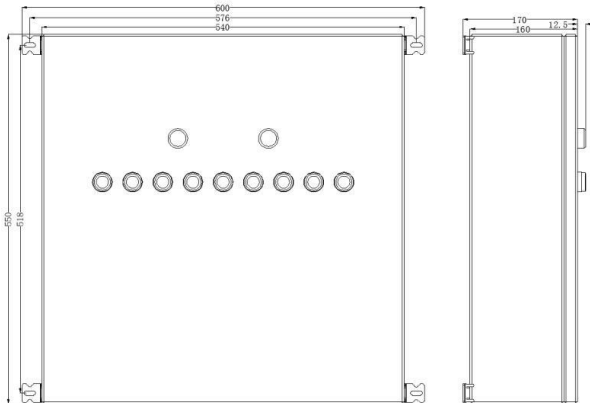

TECHNICAL SPECIFICATIONS

Operating voltage	120Vac / 180-264Vac
Power consumption	≤ 15 W
Power consumption Load	≤ 5 KW
Controllable circuits	6 Circuits
Protection index	IP 66
Operating temperature	-40° C to +60° C
Surge protection	Built in
Standards compliance	ICAO Annex 14 Volume II

ORDERING CODE

Reference	Voltage
HL-LSC-6-230	180-264Vac
HL-LSC-6-120	120vac