



PHOTOCELL


This photocell sensor should be mounted in upright position and away from artificial light such as floodlights and facade lighting. It should be installed at the place of its sensor window unobstructed view in all directions.

- Vertical surface mounting
- Automatic control of the obstruction lighting according to ambient light 50 lux – 500 lux
- Waterproof aluminum alloy enclosure IP67



TECHNICAL SPECIFICATIONS & DIMENSIONS

Protection index	IP67
Overall dimension (mm)	108(L) x 64(W) x 26(H)
Installation dimension (mm)	96 x 37 x M4
Weight	0.2 kg
Ambient light	50 – 500 lux
Operating voltage	0.6Vdc
Power consumption	0.1 W
Operating temperature	-40° C to +60° C

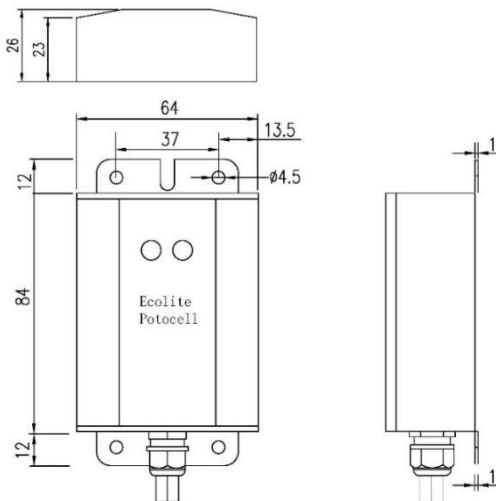

ORDERING CODE

Reference	Voltage
P-06	0.6Vdc